










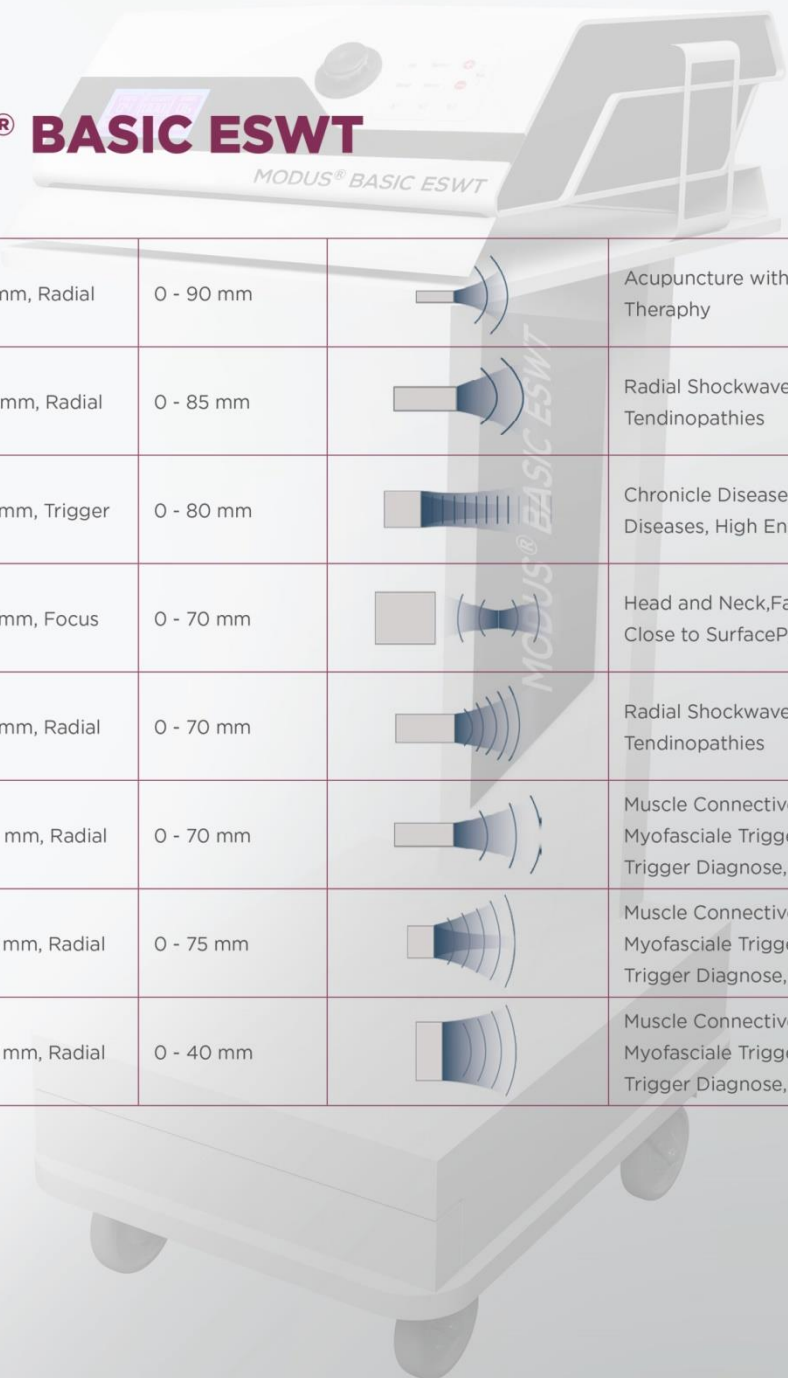







# MODUS BASIC ESWT

## MODUS® BASIC ESWT Applicators



	6 mm, Radial	0 - 90 mm		Acupuncture with Shockwave Therapy
	10 mm, Radial	0 - 85 mm		Radial Shockwave Therapy, Tendinopathies
	15 mm, Trigger	0 - 80 mm		Chronicle Diseases, Deep Placed Diseases, High Energy Needs
	15 mm, Focus	0 - 70 mm		Head and Neck, Fascial Muscles, Close to Surface Pains
	15 mm, Radial	0 - 70 mm		Radial Shockwave Therapy, Tendinopathies
	20 mm, Radial	0 - 70 mm		Muscle Connective Tissue, Myofasciale Trigger Therapy, Trigger Diagnose, Skin Elasticity
	35 mm, Radial	0 - 75 mm		Muscle Connective Tissue, Myofasciale Trigger Therapy, Trigger Diagnose, Skin Elasticity
	35 mm, Radial	0 - 40 mm		Muscle Connective Tissue, Myofasciale Trigger Therapy, Trigger Diagnose, Skin Elasticity

# MODUS BASIC ESWT

## MODUS® BASIC ESWT

### Technical Information

**Manufacturer**

İnceler Medikal Sağlık Hiz. San. Tic. Ltd. Şti.

**Model**

Modus® Basic

**Compressed Air Supply**

1-10 bar

**Average Pressure**

1 to 5 bars

**Frequency of use**

22Hz

**Power Supply**

100 – 240 VAC, 50/60 Hz, 50 W

**Fuses**

2 x 1 A, 230 VAC:

**Display**

Led LCD Display

**Treatment Start / Stop**

Main Unit Button,  
Handpiece Button and Optional Foot Pedal

**Memory**

3 - User defined

**Insulation**

Internal 12 V DC transformer insulation

**Dimensions**

320 mm x 120 mm x 390 mm Control Unit

**Weight**

5 kg

**Classification**

Conforms to EN 60601-1 criteria.

Class 1 Applied Part BF

IP 20(Foot Pedal IPX5)

MDD 93/42 CEE Class IIb

(EMC Tests Report No. LVT, Ankara)

**Applicators**

Ø 6 mm Radial P. Depth 0-90 mm

Ø 10 mm Radial P. Depth 0-85 mm

Ø 15 mm Focus P. Depth 0-70 mm

Ø 15 mm Radial P. Depth 0-70 mm

Ø 15 mm-Trigger P. Depth 0-80 mm

Ø 20 mm Radial P. Depth 0-70 mm

Ø 35 mm Radial P. Depth 0-75 mm

**Custom treatment protocol selections**

YES

**Operating environment**

10°C ≤ temperature ≤ 30°C

30% ≤ humidity ≤ 75%

700 hPa ≤ atmospheric pressure ≤ 1060 hPa

**Storage and Carriage Conditions**

-10°C ≤ temperature ≤ +40°C

10% ≤ humidity ≤ 95%

500 hPa ≤ atmospheric pressure ≤ 1060 hPa

**Modus Main Unit**

1 Unit

**Handpiece**

1 Unit

**Trolley**

1 Unit

**Compressor**

INTERNAL

**Portable Carrying Bag**

1 Unit